



Melitta® 6600

A robust coffee machine
for easy preparation
of large volumes of coffee.
Top aroma extraction guaranteed by
even pressure-free filtration system
using Pyramid® filter papers.

Melitta SystemService



Classic

The flexible modular concept

The **Melitta® 6600** for largescale catering requirements utilizes the tried-and-tested **Melitta® Pyramid filter** principle ensuring optimal aroma development. The filter also makes it virtually impossible for any unpleasant roasting and bitter substances to get into the beverage.

After use, the filter paper and coffee sediment can be easily composted - a contribution towards waste reduction and a healthy environment.

Hot water unit, pyramid filter and coffee urn form a unit which can be expanded upon as required:

For example, by a special counter with height-adjustable drip-tray, enabling easy filling of large coffee pots, or by a practical service trolley.

All elements are engineered from high quality materials, making the machine ideally suited for use in kitchens, canteens and banquet halls.

A modular system guaranteeing both ease of use and economy.

The benefits at a glance

The **Melitta® 6600** has been designed to meet everyday needs and is therefore highly flexible. Every machine or unit is individually “tailored” to meet your specific volume or space requirements.

Pressure-free
Melitta® Pyramid filter
guarantees optimal
extraction even at
small volumes.

Volume selection.
Flexible capacity
from just 2 litres up.
Additional:
Descaling indicator.

Raised base for filling
large coffee pots.

Hot water discharge
expands range of
beverage types
available.



Special counter





Serving trolley

Modules



Melitta® 6600

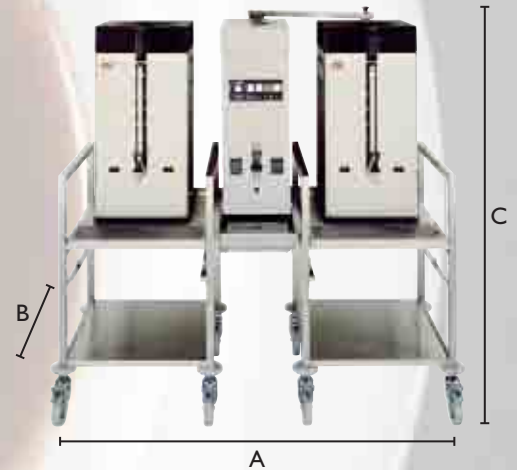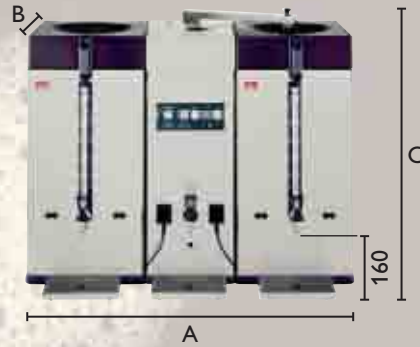

Melitta®

Technical data

	Width mm A	Depth mm B	Height mm C	Storage capacity (l)	Capacity (cups/hour)	Capacity hot water (l/hour)	Required Voltage kW /ampère	Volume selection (l)
Counter-top model (without hot water discharge)								
6610-1	684	531	787	1 x 10	320	–	400/6.43/16	2-4-6-8-10
6610-2	1076	531	787	2 x 10	400	–	400/6.65/16	2-4-6-8-10
6620-1	684	531	890	1 x 20	480	–	400/9.38/16	2-5-10-15-20
6620-2	1076	531	890	2 x 20	580	–	400/9.65/16	2-5-10-15-20
Counter-top model (with hot water discharge)								
6610 W-1	684	531	787	1 x 10	320	15	400/8.5/20	2-4-6-8-10
6610 W-2	1076	531	787	2 x 10	400	15	400/8.72/20	2-4-6-8-10
6620 W-1	684	531	890	1 x 20	480	15	400/11.45/25	2-5-10-15-20
6620 W-2	1076	531	890	2 x 20	580	15	400/11.72/25	2-5-10-15-20
Mobile system (without hot water tap connection)								
6610-15	1000	740	1487	1 x 10	320	–	400/6.43/16	2-4-6-8-10
6610-25	1700	740	1487	2 x 10	400	–	400/6.65/16	2-4-6-8-10
6620-15	1000	740	1487	1 x 20	480	–	400/9.38/16	2-5-10-15-20
6620-25	1700	740	1487	2 x 20	580	–	400/9.65/16	2-5-10-15-20
Mobile system (with hot water tap connection)								
6610 W-15	1000	740	1487	1 x 10	320	15	400/6.43/16	2-4-6-8-10
6610 W-25	1700	740	1487	2 x 10	400	15	400/6.65/16	2-4-6-8-10
6620 W-15	1000	740	1487	1 x 20	480	15	400/9.38/16	2-5-10-15-20
6620 W-15	1700	740	1487	2 x 20	580	15	400/9.65/16	2-5-10-15-20

Water supply at customer's site R 3/4" A/DN 15 • Drain at customer's site NW 1". Further assembly details are provided with the technical data sheet.



MELITTA® FOR THE ULTIMATE IN COFFEE ENJOYMENT

Melitta SystemService GmbH & Co. KG • P.O. Box 1326 • D-32373 Minden • Germany • Phone: +49 (0)571 5049-0 • Fax: +49 (0)571 5049-233 • E-Mail: info@mss.melitta.de • www.melittasystems-service.de